

01-28-00

Atty. Dkt. No. 29423/207

A

## IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicants: Gridley et al.


Title: METHOD AND APPARATUS FOR  
RETREADING TIRES

Appl. No.: To Be Determined

Filing Date: To Be Determined

Examiner: To Be Determined

Art Unit: To Be Determined

CERTIFICATE OF EXPRESS MAILING	
I hereby certify that this correspondence is being deposited with the United States Postal Service's "Express Mail Post Office To Addressee" service under 37 C.F.R. § 1.1-10 on the date indicated below and is addressed to: Assistant Commissioner for Patents, Washington, D.C. 20231.	
EL289242160US (Express Mail Label Number)	11/27/00 (Date of Deposit)
Teri Hoelt (Printed Name)  (Signature)	

**UTILITY PATENT APPLICATION  
TRANSMITTAL**

Assistant Commissioner for Patents  
Box PATENT APPLICATION  
Washington, D.C. 20231

Sir:

Transmitted herewith for filing under 37 C.F.R. § 1.53(b) is the nonprovisional utility patent application of:

Jason L. Gridley  
Estes M. Daugherty  
Paul J. Conder

Enclosed are:

- ☒ [ X ] Specification, Claim(s), and Abstract (20 pages).
- ☒ [ X ] Informal drawings (5 sheets, Figures 1-5).
- ☐ [ ] Declaration and Power of Attorney (\_\_\_ pages).
- ☐ [ ] Assignment of the invention to Bandag Incorporated.
- ☐ [ ] Assignment Recordation Cover Sheet.
- ☐ [ ] Check in the amount of \$40.00 for Assignment recordation.
- ☐ [ ] Small Entity statement.
- ☐ [ ] Information Disclosure Statement.
- ☐ [ ] Form PTO-1449 with copies of listed reference.

The filing fee is calculated below:

	Claims as Filed	Included in Basic Fee	Extra Claims	Rate	Fee Totals
Basic Fee				\$690.00	\$690.00
Total Claims:	29	20	9	x \$18.00	\$162.00
Independents:	4	3	0	x \$78.00	\$78.00
If any Multiple Dependent Claim(s) present:				+ \$260.00	\$0.00
				SUBTOTAL:	\$930.00
[ ] Small Entity Fees Apply (subtract 1/2 of above):					\$0.00
				TOTAL FILING FEE:	\$930.00

- [ ] A check in the amount of \$930.00 to cover the filing fee is enclosed.
- [X] The required filing fees are not enclosed but will be submitted in response to the Notice to File Missing Parts of Application.
- [ ] The Assistant Commissioner is hereby authorized to charge any additional fees which may be required regarding this application under 37 C.F.R. §§ 1.16-1.17, or credit any overpayment, to Deposit Account No. 06-1447. Should no proper payment be enclosed herewith, as by a check being in the wrong amount, unsigned, post-dated, otherwise improper or informal or even entirely missing, the Assistant Commissioner is authorized to charge the unpaid amount to Deposit Account No. 06-1447.

Please direct all correspondence to the undersigned attorney or agent at the address indicated below.

Respectfully submitted,

Date January 27, 2000

By Alistair K. Chan

FOLEY & LARDNER  
Firstar Center  
777 East Wisconsin Avenue  
Milwaukee, Wisconsin 53202-5367  
Telephone: (414) 297-5730  
Facsimile: (414) 297-4900

Alistair K. Chan  
Attorney for Applicants  
Registration No. 44,603

00492602-012700

**U.S. PATENT APPLICATION**

**for**

**METHOD AND APPARATUS FOR RETREADING TIRES**

Inventors: Jason L. Gridley  
Estes M. Daugherty  
Paul J. Conder

002210 2022462

## METHOD AND APPARATUS FOR RETREADING TIRES

### FIELD OF THE INVENTION

The invention relates generally to a method and apparatus for making retreaded tires and particularly to a method of and apparatus in which the steps in making a retreaded tire are combined on a single  
5 integrated machine.

### BACKGROUND OF THE INVENTION

Retreaded tires are readily available and provide an economical way to gain additional use out of tire casings after the original tread or retread has become worn. According to a conventional method  
10 of retreading, sometimes referred to as cold process retreading, worn tire tread on a used tire is removed by a special buffing machine that grinds away old tread and leaves a buffed surface to which a new layer of tread may be bonded.

Removal of old tread from the tire casing provides a generally  
15 smooth treadless surface about the circumference of the tire casing. The tire casing may then be examined for injuries, which are skived and filled with a repair gum. After completion of the skiving process, the buffed surface may be sprayed with a tire cement that provides a tacky surface for application of bonding material and new tread. Next a layer of cushion  
20 gum is applied to the back, i.e., the inside surface of a new layer of tread, or alternatively, the layer of cushion gum is applied directly to the tacky surface on the tire casing. Conventionally, the cushion gum is a layer of uncured rubber material. The cushion gum and tread may be applied in combination about the circumference of the tire casing to create a  
25 retreaded tire assembly ready for curing. Alternatively, a length of tire tread is wrapped around the tire casing with the cushion gum already

applied. The cushion gum forms the bond between the tread and the tire casing during curing.

Following assembly of the tire casing, cement, cushion gum and tread, the overall retreaded tire assembly is placed within a flexible rubber envelope. An airtight seal is created between the envelope and the bead of the tire. The entire envelope tire assembly is placed within a curing chamber, and subjected to pressure and a raised temperature for a specific period of time. The combination of pressure, temperature, and time binds a layer of cushion gum to both the tire casing and the new tire tread.

The above-described method of cold process retreading is often accomplished on a tire builder. Conventional tire builders include a spindle on which a tire is mounted and a spindle on which a roll of tire cushion gum is mounted for dispensing. Typically the cushion gum may be dispensed by hand as the tire is rotated to adhere the cushion gum to the tire casing.

In certain applications, it may be advantageous to eliminate the spray cement completely. This may be particularly true in geographical areas where there is increased regulation of the use of chemicals within spray cement products. Further, use of spray cement can also add to the cost of producing retreaded tires due to the product cost and equipment cost. Various solutions to enable a cementless process have been suggested, for example, extruding heated cushion gum directly to a tire casing. This process however, is costly due to equipment costs and is unnecessarily complex.

After the cushion gum has been applied, the circumference of the tire casing with cushion gum is measured and an applicable length of tread is measured out, conventionally on a separate bench. The tire tread is manually cut to length.

In all tire building systems once the cushion gum has been applied and the tread has been cut to length, the tread must be applied to the cushion gum and casing. Due to errors in the cut length of the tire tread it may be desirable to stretch the tire tread around the perimeter of the tire casing and cushion gum in order to create an appropriately sized splice.

Further, it is often desirable, for aesthetic and structural strength purposes, to match the tire tread design at each end of the tire tread length so that where the two ends of the tire tread length match at the splice, the repetitive pattern of the tire tread design is substantially continuous. To create such a splice, it may be necessary to stretch the tire tread around the circumference of the tire casing and cushion gum because the tire tread length may have been cut to an extra shortened length in order to cause the matching of the tire tread design at the two ends of the tire tread.

Accordingly, there is a need for an integrated tread bench that combines the processes of cushion application, tread cutting and tread application into a single work bench machine while semi-automating the plurality of steps required to produce a finished retread tire prior to curing. There is also a need for a cushion gum application process and apparatus that controls the stretch of the cushion gum during application to the tire casing. Further, there is a need for a method and apparatus for applying cushion gum to a tire casing that uses a cementless application and stitching process. Further, there is a need for a semi-automatic method and apparatus for cutting an appropriate length of tire tread. Further still, there is a need for a semi-automatic method and apparatus of applying tire tread in a controlled stretch to a casing with an applied cushion gum to produce a tire with a predetermined range of splice size. Yet further still, there is a need for a semi-automatic method and

apparatus of cutting and applying tire tread lengths such that the periodic tire tread design is substantially continuous in the retread tire.

### SUMMARY OF THE INVENTION

00492602-012700

An exemplary embodiment of the invention relates to an  
5 apparatus for retreading tires. The apparatus includes a tire casing mount configured to have a tire casing mounted thereto. The apparatus also includes a cushion gum applicator configured to stretch a length of cushion gum onto the tire casing. Further, the apparatus includes a tread dispenser configured to automatically dispense a length of tire tread based  
10 on the circumference of at least one of the tire casing and the tire casing plus the cushion gum. Further still, the apparatus includes a tread applicator configured to stretch the length of tire tread onto the cushion gum. The cushion gum applicator, the tread dispenser, and the tread applicator are integrated into a single machine.

15 Another exemplary embodiment of the invention relates to an apparatus for retreading tires. The apparatus includes a hub for mounting a tire casing. The apparatus also includes a cushion gum applicator configured to stretch a length of cushion gum onto the tire casing, the stretch being controlled during application. Further, the apparatus  
20 includes a tread dispenser configured to automatically dispense a length of tire tread based on the circumference of at least one of the tire casing and the tire casing plus the cushion gum. Further still, the apparatus includes a tread applicator configured to apply the length of tire tread onto the cushion gum.

25 Yet another exemplary embodiment of the invention relates to an apparatus for retreading tires. The apparatus includes a rotatable hub for mounting a tire casing. The apparatus also includes a cushion gum applicator configured to stretch a length of cushion gum onto the tire casing. Further, the apparatus includes a tread dispenser configured to

automatically dispense a length of tire tread based on the circumference of at least one of the tire casing and the tire casing plus the cushion gum. The length of tire tread has a first end and a second end and a periodically repeating tread pattern. Further still, the apparatus includes a tread cutter  
 5 configured to cut the tread to a determined length and a tread applicator configured to apply the length of tire tread onto the cushion gum.

Yet further still, an exemplary embodiment of the invention relates to a method of retreading tires. The method includes mounting a tire casing on a hub, the hub being rotatable. The method also includes  
 10 stretching a length of cushion gum around the circumference of the tire casing, the stretch being controlled during application. Further, the method includes measuring the circumference of the tire casing with the cushion gum applied. Further still, the method includes dispensing, automatically, a length of tire tread based on the circumference of the tire  
 15 casing with the cushion gum applied. Yet further still, the method includes applying the length of tire tread to the cushion gum. The stretching, measuring, dispensing, and applying are performed on an integrated machine.

### BRIEF DESCRIPTION OF THE DRAWINGS

20 The Invention will become more fully understood from the following detailed description, taken in conjunction with the accompanying drawings, wherein like reference numerals refer to like elements, in which:

FIG. 1 is a mechanical drawing of an integrated tire bench  
 25 system;

FIG. 2 is a perspective view of an integrated tire bench  
 system;

FIG. 3 is a partial elevation view of an integrated tire bench  
 system;

04:02:02 012700



FIG. 4 is a cross-sectional view of a tire casing in an application or stitching operation; and

FIG. 5 is a depiction of the kinematics of a cushion gum application process.

## DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring to FIGs. 1 and 2, an integrated tire bench 10 is depicted. Tire bench 10 is a semi-automated retread tire building apparatus configured to assemble retread tires. In an exemplary embodiment, tire bench 10 includes a rotatable hub 20 for mounting a tire casing thereon. In an exemplary embodiment, hub 20 may be a variable size hub that incorporates an automated inflation system and is configured to accommodate tires having different sizes (widths and radii).

Tread bench 10 includes an operator control panel 25 having a plurality of buttons and gauges 26 to partially control and monitor operations of tread bench 10. Tread bench 10 also includes a cushion gum applicator system 30. Cushion gum applicator system 30 includes a spindle 32 to which may be mounted a roll of cushion gum 34 provided for dispensing onto a tire casing 22 mounted on hub 20.

Cushion applicator system 30 also includes a drive wheel 36 that is configured to engage the surface of a tire casing and is driven by the rotation of tire casing 22. In an exemplary embodiment, drive wheel 36 is coupled to spindle 32a via a system of gears and/or belts 37, such that spindle 32a rotates with a surface velocity that is proportional to the surface velocity with which casing 22 is rotated by a drive system 23, rotating hub 20.

Further still, in an exemplary embodiment, tread bench 10 includes a set of applicator/stitcher wheels 40. Applicator/stitcher wheels 40 are movable relative to one another and may be moved adjacent one another to form a single applicator/stitcher wheel. Applicator/stitcher

wheels 40 may be moved apart to perform stitching operations. Applicator/stitcher wheels 40 may also be moved in a direction substantially normal to the surface of the tire casing to apply a variably controlled force to the surface in contact with applicator/stitcher wheels 40.

A measurement wheel 50 is provided on a measurement arm 52. Measurement arm 52 is pivotable by actuation through a pneumatic cylinder 54 to engage a surface (either a tire casing, or cushion gum applied to a tire casing). Measurement wheel 50 rotates, as a tire casing 22 is rotated on an axis 24. Measurement wheel 50 is coupled to an encoding device which encodes the angular variation of measurement wheel 50 for communication to a central processing unit or control unit. In combination, wheel 50 with control unit yields appropriate measurement of wheel circumference. In alternative embodiments, other measurement devices may be incorporated into the design without departing from the spirit and scope of the invention.

Tread bench 10 also includes a tread dispensing system 60. Referring now to FIG. 3, tread dispensing system 60 includes a tread rollers 62 on which a roll of rubber tire tread 64 may be mounted. Tread dispensing system 60 also includes a set of drive rollers 66 which may be used to pull tire tread 68 from roll 64 and push out a length of tire tread 79 away from rollers 66. Tread dispensing system 60 also includes a knife 70 for cutting a length of tire tread 79 from uncut tread 68. Further still, tread dispensing system 60 includes a first clamp 72 and a second clamp 74. First clamp 72 is configured to clamp tire tread 68 at or near a first end 76. Second clamp 74 is configured to clamp tire tread 68 at or near a second end 78, created by knife 70.

Tire bench 10 includes a curved track that may be a set of rollers 82 mounted along curved track 80. Curved track 80 is configured as a curve to provide a desirable height for operator access at or near

knife 70. Further, curved track 80 is configured to deliver tire tread section 79 to the end of track 80 adjacent casing 22, for assembly thereon, without introducing any substantial bending or stretching caused by abrupt changes in the path of travel of section 79 and further to facilitate the movement of first clamp 72 and second clamp 74 along track 80. Curved track 80 is also appropriately curved to allow a desirable height for operator access near knife 70 while providing adequate height at the opposite end to accommodate tires of large size.

In an exemplary embodiment, first clamp 72 pulls tread section 79 along track 80 to provide tread section 79 to contact casing 22. As tread section 79 is applied to tire casing 22, second end 78 is at a known location because clamp 74 includes an encoder (in communication with a central processing unit or control unit) configured to track the location of end 78 relative to end 76 which is engaged with casing 22. Both clamps 72 and 74 have encoders incorporated therein to track the location of clamps 72 and 74 along track 80. In an exemplary embodiment, the encoders of clamps 72 and 74 are able to measure changes every millimeter. However, encoders of clamps 72 and 74 are not limited to receiving data every millimeter but may be configured to receive information on larger or smaller scales. The measurement of changes every millimeter provides a substantially continuous location signal to a central processing unit or control unit used to control the application process. However, it may be desirable to provide substantially continuous monitoring with coarser or finer measurements.

In operation, an operator mounts a tire casing 22 to hub 20. Hub 20 may be moved laterally, along the axis of rotation in order to center hub 20 relative to a longitudinal center line of tread bench 10, which corresponds to the center line of cushion gum 34 and tire tread roll 64. Once the casing has been mounted, the casing is then inflated and centered. Therefore, the first step for the operator after mounting and

inflating casing 22 is to align the center line of tire casing 22 with the center line of the cushion gum 34 and tire tread roll 64, which are automatically aligned with the tread bench 10 centerline by a system of clamps, guides, rollers, or other alignment devices. Next, measurement wheel 50 is brought into contact with the outer surface of casing 22. Tire casing 22 is rotated to provide a measurement of the circumference of casing 22. While casing 22 is rotated a full revolution, measurement wheel 50 encodes rotations of measurement wheel 50 which are communicated to a central processing unit or control unit where a determination of the circumference of tire casing 22 is calculated. From the measurement of the circumference of casing 22, a desired maximum angular velocity is determined, based on a desired value of the tangential velocity of points on the surface of casing 22 during cushion gum application.

In an exemplary embodiment it may be desirable to obtain a maximum tangential velocity of points on the surface of casing 22 during cushion gum application, for casings of various sizes, the maximum tangential velocity being constant across the range of sizes. To provide a constant maximum velocity across the range of sizes requires knowledge of the size (i.e., the circumference) of each casing. Alternatively, it may be desirable to vary the tangential velocity based on size, or it may be desirable to provide a constant angular velocity over the range of sizes.

Next, drive roller 36 is brought into contact with the outer surface of casing 22. A length of cushion gum is dispensed from roll 34 and applied to the surface of casing 22. Casing 22 is rotated and consequentially rotates both drive wheel 36 and spindle 32 causing the cushion gum to stretch and be applied to casing 22. To produce the controlled stretch of cushion gum 34, casing 22 is driven by the rotation of hub 20 through drive system 23. Drive wheel 36, which engages casing 22, is caused to rotate and drive a system of gears and/or belts 37

thereby driving spindle 32a at a linear surface velocity based proportionally on the linear surface velocity of casing 22. Gearing 37 is configured such that a linear velocity of cushion gum being dispensed from roll 34 is less than the tangential velocity of points on the perimeter of casing 22. Therefore, the differential velocity, that is the tangential velocity of a point on the perimeter of casing 22 minus the linear velocity of cushion gum leaving roll 34, is non-negative. The differential velocity therefore produces a stretching of cushion gum 34 as it is being applied to the exterior of casing 22.

Referring now to FIG. 5, to fully illustrate the cushion gum stretching process, roll 34 is depicted having an angular velocity  $\omega_2$ . Cushion gum 34 is shown being applied to casing 22, casing 22 having an angular velocity  $\omega_1$ . To cause stretching of cushion gum 34, a point 90 on the surface of casing 22 has a velocity  $V1$ , a point 91 on the cushion gum, being dispensed from the roll 34, has a velocity  $V2$ . Because  $\omega_1$  and  $\omega_2$  are geared to provide different  $V2$  and  $V1$ , where  $V1$  is greater than  $V2$ , a differential velocity  $\Delta V = V1 - V2$ , that is non-negative is created. Therefore, due to the differential velocity, the cushion gum is necessarily stretched.

As depicted in FIG. 4, casing 22 has a curved crown section 27. Crown 27 is substantially the surface to which cushion gum 34 is applied. In an exemplary embodiment, cushion gum 34 has a polyethylene protective layer 35 adhered thereto, to prevent adhesion to other layers of cushion gum while rolled and to prevent adhesion to application rollers 40 during application. The controlled stretching of cushion gum 34, by the differential velocity introduced by gears 37, provides improved conformity of cushion gum 34 to the contoured crown 23 of casing 22. The improved conformity provides uniform adhesion and contact of cushion gum 34 to crown 23, causing the cushion gum edge to substantially contact casing 22 wrinkle-free and further reduces the

need for providing extra strips of cushion gum along shoulders 21 of crown 23 (i.e., cushion gum stripping).

Because measurement of the circumference of casing 22 was provided by measurement wheel 50, the known length of cushion gum 34 is dispensed to fully encompass the perimeter of casing 22.

After cushion gum 34 has been applied to casing 22, rollers 40 are moved to engage and provide a force onto cushion gum 34. Casing 22 is rotated while rollers 40 provide a force, in a direction indicated by arrow 37 in FIG. 4, onto cushion gum 34. In an exemplary embodiment, wheels 40 begin in the middle of crown 23 and, during subsequent rotations, wheels 40 are moved towards shoulders 21 of crown 23 in the directions indicated by arrows 41. This operation, often referred to as stitching, provides desirable adherence of cushion gum 34 to the surface of casing 22 (crown 27 and shoulders 21), while aiding in removing any trapped air pockets between cushion gum 34 and casing 22. After the stitching operation is completed, a measurement of the circumference of tire casing 22 plus cushion gum layer 34 is taken by measurement wheel 50 as casing 22 is rotated. Polyethylene layer 35 is then removed.

Based on the measured circumference of tire casing 22 with cushion gum layer 34 adhered thereto, a desired length of tire tread may be determined. In an exemplary embodiment, the determined length is dispensed from tread roll 64, as depicted in FIG. 3. The tread 68 is dispensed by drive rollers 66 beneath a retracted cutter 70 and through clamps 72 and 74 to a stop 75 which is extended upwardly above track 80. When end 76 engages stop 75, clamp 72 is selectively commanded to engage tread section 79 (adjacent end 76) to carry tread 79 along with movements of clamp 72. Stop 75 is then lowered and based on a determined length, roller 66 drives tread 68 pushing end 76 along track 80 and past clamp 74, while clamp 72 cooperatively propels tread end 76

along track 80. When an approximate desired length has been reached, based on aforementioned circumferential measure, drive 66 stops deploying tread 68 and clamp 72 stops propelling tread end 76.

In an exemplary embodiment, an operator may, once an approximate length of tread 68 has been deployed, make minor adjustments to a location of cut 78 in tread 68. It may be desirable for an operator to match the periodically repeating tread design of end 76 with the tread design at end 78. Matching the designs of ends 76 and 78 provide a preferred aesthetic appeal and structural strength, at the splice region in a completed retread tire by providing a continuously repeating tread design substantially unbroken by the splice. (In an alternative embodiment, the process of selecting the appropriate splice location, based on the tread design may be carried out by image processing devices which control the deployment of tread 68, location of end 78, and matching of designs on ends 76 and 78). Once the targeted location of end 78 is determined by an operator, or alternatively by automated methods, cutter 70 is used to cut section 79 away from tread 68 remaining behind knife 70 and on roll 64. Further, clamp 74 is clamped in a position adjacent end 78.

After end 78 has been created by cutter 70, clamp 72, which moves along track 80, pulls section 79 along track 80. End 76 is then put in contact with cushion gum 34 on casing 22 and application wheels 40 are lowered to engage end 76 of tread 79. An encoder is used to determine the location of end 76 relative to casing 22. The location of end 76 is substantially continuously communicated to a central processing unit or control unit. Casing 22 is then rotated while applicator wheels 40 provide a variably controlled pressure to tread 79. The applied pressure by wheels 40 provide adherence of tread 79 to cushion gum 34 and extend the overall length of tread 79 due to the force being exerted by applicator wheels 40 and the associated Poisson effect.

00452602-012700

As casing 22 is rotated, the location of clamp 74 and hence end 78 of tread 79 is monitored. Further, because the location of edge 76 and the circumference of casing 22 with cushion gum 34 applied thereto is known, the circumferential distance yet to be covered by tread 79, may be deduced. By comparing the remaining circumferential distance to be covered and the amount of tread not yet applied, an appropriate force may be commanded to be applied by applicator wheels 40, to provide the appropriate amount of stretching and ultimately to match ends 76 and 78 with a gap having a gap length falling within a predetermined range.

Once the tread 79 has been applied, the operator may manually provide finishing operations to the splice area, or alternatively devices may be added to automatically finish the splice area. Finally, tire casing 22, may be removed from hub 20, and placed in a pressurized flexible envelope for curing.

Those who have skill in the art will recognize that the present invention is applicable with many different hardware configurations, software architectures, sensing and communication devices, and mechanical configurations.

While the detailed drawings, specific examples, and particular formulations given describe exemplary embodiments, they serve the purpose of illustration only. The materials and configurations shown and described may differ depending on the chosen performance characteristics and physical characteristics of tires and tire treads. For example, the layout and configuration of the tread bench may differ. The systems shown and described are not limited to the precise details and conditions disclosed. Furthermore, other substitutions, modifications, changes, and omissions may be made in the design, operating conditions, and arrangement of the exemplary embodiments without departing from the spirit of the invention as expressed in the appended claims.



**WHAT IS CLAIMED IS:**

- 1                   1.     An apparatus for retreading tires, comprising:  
2                             a tire casing mount configured to have a tire casing  
3     mounted thereto;  
4                             a cushion gum applicator configured to stretch a  
5     length of cushion gum onto the tire casing;  
6                             a tread dispenser configured to automatically dispense  
7     a length of tire tread based on the circumference of at least one of the tire  
8     casing and the tire casing plus the cushion gum; and  
9                             a tread applicator configured to stretch the length of  
10    tire tread onto the cushion gum,  
11                            wherein the cushion gum applicator, the tread  
12    dispenser, and the tread applicator are integrated into a single machine.
- 1                   2.     The apparatus of claim 1, further comprising:  
2                             a measuring device configured to measure at least one  
3     of the circumference of the tire casing and the cushion gum.
- 1                   3.     The apparatus of claim 1, wherein the tread dispenser  
2     comprises:  
3                             a tread cutter, configured to cut the tread to a  
4     determined length.
- 1                   4.     The apparatus of claim 1, wherein the tread dispenser  
2     comprises:  
3                             a curved track for guiding the length of tire tread.
- 1                   5.     The apparatus of claim 1, wherein the tread dispenser  
2     comprises:  
3                             a first clamp for clamping the length of tire tread  
4     adjacent a first end; and

5 a second clamp for clamping the length of tire tread  
6 adjacent a second end.

1 6. An apparatus for retreading tires, comprising:  
2 a rotatable hub for mounting a tire casing;  
3 a cushion gum applicator configured to stretch a  
4 length of cushion gum onto the tire casing, the stretch being controlled  
5 during application;  
6 a tread dispenser configured to automatically dispense  
7 a length of tire tread based on the circumference of at least one of the tire  
8 casing and the tire casing plus the cushion gum; and  
9 a tread applicator configured to apply the length of tire  
10 tread onto the cushion gum.

1 7. The apparatus of claim 6, further comprising:  
2 a measuring device configured to measure the  
3 circumference of the tire casing.

1 8. The apparatus of claim 7, wherein the hub is rotated  
2 at an angular rate based on the circumference of the tire casing.

1 9. The apparatus of claim 6, further comprising:  
2 a rotatable spindle configured to dispense a length of  
3 cushion gum from a roll mounted on the spindle.

1 10. The apparatus of claim 9, wherein the hub is rotated  
2 at a first angular rate, the spindle is rotated at a second angular rate, and  
3 the second angular rate is proportional to the first angular rate.

1 11. The apparatus of claim 9, wherein the hub is rotated  
2 at a first angular rate and a point on the perimeter of the tire casing has a  
3 first tangential velocity, the spindle is rotated at a second angular rate and  
4 a point on the perimeter of the roll has a second tangential velocity, and

5 the first tangential velocity minus the second tangential velocity provide a  
6 nonnegative differential velocity.

1 12. The apparatus of claim 11, wherein the differential  
2 velocity is substantially constant during application of the cushion gum.

1 13. An apparatus for retreading tires, comprising:  
2 a hub for mounting a tire casing;  
3 a cushion gum applicator configured to stretch a  
4 length of cushion gum onto the tire casing;  
5 a tread dispenser configured to automatically dispense  
6 a length of tire tread based on the circumference of at least one of the tire  
7 casing and the tire casing plus the cushion gum, the length of tire tread  
8 having a first end and a second end and a periodically repeating tread  
9 pattern;

10 a tread cutter configured to cut the tread to a  
11 determined length; and

12 a tread applicator configured to apply the length of tire  
13 tread onto the cushion gum.

1 14. The apparatus of claim 13, wherein the determined  
2 length is specified by an operator.

1 15. The apparatus of claim 13, wherein the determined  
2 length is based on matching the pattern at the first end with the pattern  
3 at the second end of the tire tread.

1 16. The apparatus of claim 13, wherein the determined  
2 length may be automatically specified.

1 17. The apparatus of claim 16, wherein the tread cutter is  
2 configured to automatically cut the tread to the determined length.

1                   18. The apparatus of claim 13, wherein the tread  
2 applicator monitors the length of tire tread that has been applied to the  
3 cushion gum and the length of tire tread that has yet to be applied.

1                   19. The apparatus of claim 13, wherein the tread  
2 applicator is configured to stretch the tire tread onto the cushion gum.

1                   20. The apparatus of claim 13, wherein the tread  
2 applicator is configured to stretch the tire tread onto the cushion gum, the  
3 stretch being controlled such that the gap, between the first end and the  
4 second end when the tire tread has been applied to the cushion gum, is  
5 within a predetermined range of distances.

1                   21. The apparatus of claim 13, wherein the tread  
2 applicator includes an applicator roller.

1                   22. The apparatus of claim 21, wherein the applicator  
2 roller is configured to apply the tread to the cushion gum with a variably  
3 controlled force.

1                   23. A method of retreading tires, comprising:  
2 mounting a tire casing on a hub, the hub being  
3 rotatable;  
4 stretching a length of cushion gum around the  
5 circumference of the tire casing, the stretch being controlled during  
6 application;  
7 measuring the circumference of the tire casing with  
8 the cushion gum applied;  
9 dispensing, automatically, a length of tire tread based  
10 on the circumference of the tire casing with the cushion gum applied; and  
11 applying the length of tire tread to the cushion gum,

12                    wherein the stretching, measuring, dispensing, and  
13    applying are performed on an integrated machine.

1                    24.    The method of claim 23, further comprising:  
2                    measuring the circumference of the tire casing.

1                    25.    The method of claim 24, further comprising:  
2                    rotating the hub at an angular rate based on the  
3    circumference of the tire casing.

1                    26.    The method of claim 23, further comprising:  
2                    cutting the tire tread to an automatically determined  
3    length.

1                    27.    The method of claim 23, further comprising:  
2                    cutting the tire tread to an operator determined length.


1                    28.    The method of claim 23, further comprising:  
2                    cutting the tire tread to a length based on the tire  
3    tread design.


1                    29.    The method of claim 23, wherein applying the length  
2    of tire tread includes controlling an application pressure.

**ABSTRACT**


An apparatus for retreading tires is disclosed. The apparatus has a rotatable hub for the mounting of a buffed tire casing. The apparatus also has a cushion gum applicator that is configured to stretch  
5 a length of cushion gum onto a tire casing. Further, the apparatus has a tread dispenser that is configured to automatically dispense a length of tire tread based on the circumference of at least one of the tire casing and the tire casing plus the cushion gum. Further still, the apparatus includes a tread applicator that is configured to stretch the length of tire tread onto  
10 the cushion gum. The entire apparatus including the cushion gum applicator, the tread dispenser, and the tread applicator are integrated into a single tire bench machine.

09492602-012700  
007210-20926160

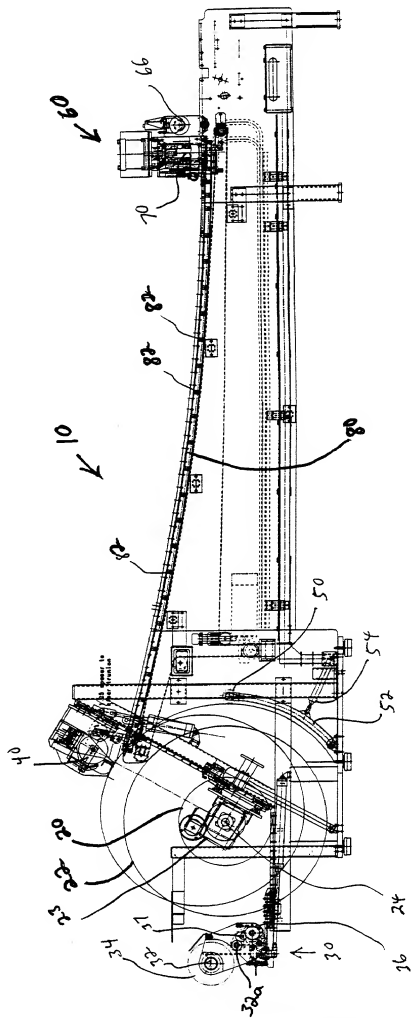

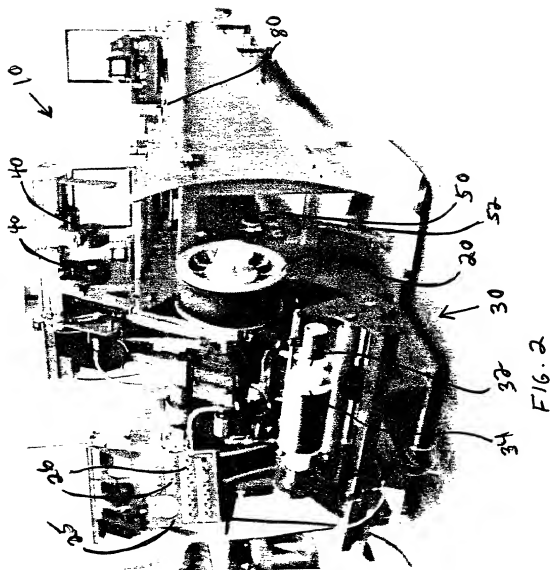



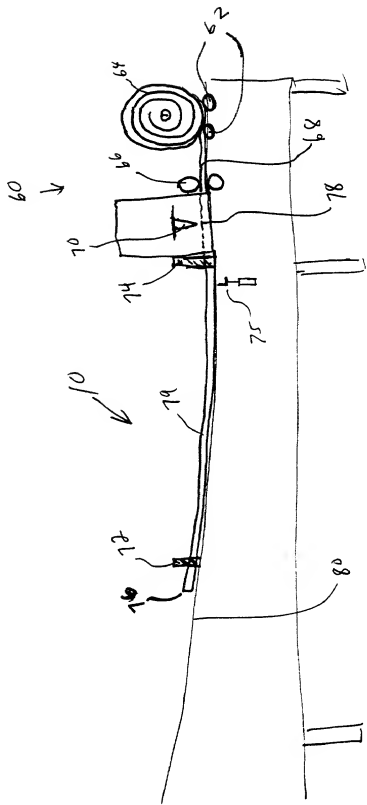

F16.3

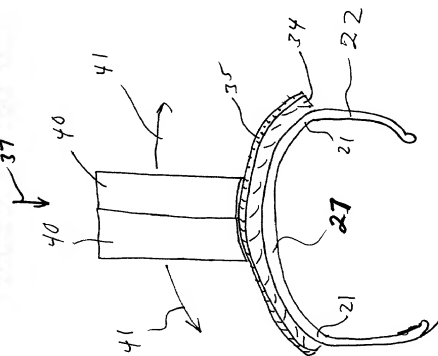


FIG. 4

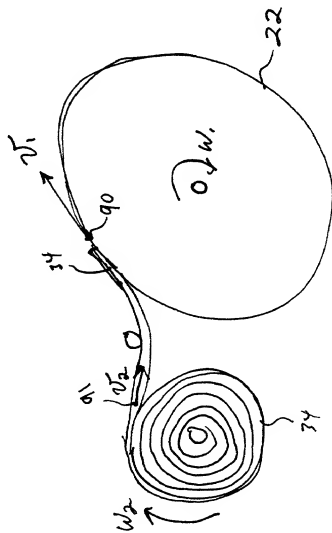


FIG. 5